


UNI-PAC 1

Uni-Pac 1 is a 100% pure Graphite packing which is capable of near universal application. Uni-Pac 1 is inter-braided from pure Graphite yarn impregnated fibre by fibre with pure Graphite powder.

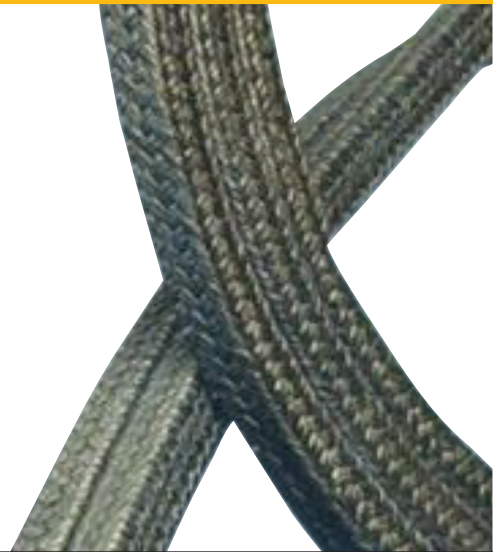

SERVICE & PROPERTIES:

The Graphite powder increases the natural sealing effect of the Graphite yarns and acts as a surface lubricant to produce a virtually non-scoring packing.

Exfoliated Graphite is superior to any other yarn in the degree to which it combines outstanding packing properties, namely; excellent thermal conduction, smooth running, near universal chemical resistance and extreme temperature capability.

The utilisation of Uni-Pac 1 pure Graphite fibre packing provides the opportunity to extend the use of the packed gland into extreme areas of speed, temperature and chemical resistance. In more normal applications, the quality of Uni-Pac 1 will result in maintenance savings many times in excess of the actual packing cost.

Uni-Pac is also good for reducing leakage and emissions saving money and protecting the environment.

Maximum temperature: 2000 °C

TYPICAL PHYSICAL PROPERTIES:

Pressure Rating: 300 bar	Rotary Speed: 1 m/s
Maximum Temperature Inert	427 °C
Maximum Temperature Oxidising	2000 °C
pH Range	0 - 14

As the company's products are used for multiplicity of purposes, and as the company has no control over the method of their applications or use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise, as to their products and/or their fitness for any particular purpose. Any technical co-operation between the company and the customer is given for customers assistance only and without liability on the part of the company. The Company does not give any warranty that the product will be suitable for the use intended by the customer.